



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

H04L 12/14

A1

(11) International Publication Number:

WO 97/37462

(43) International Publication Date:

9 October 1997 (09.10.97)

(21) International Application Number: PCT/GB97/00842

(22) International Filing Date: 26 March 1997 (26.03.97)

(30) Priority Data:

9606622.0	29 March 1996 (29.03.96)	GB
9700365.1	9 January 1997 (09.01.97)	GB

(71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PLC [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LYNCH-AIRD, Nicolas, James [GB/GB]; The Old Forge, Burnt House Lane, Batisford, Stowmarket, Suffolk IP14 2ND (GB).


(74) Agents: ROBERTS, Gwilym, Vaughan et al.; Kilburn & Strode, 30 John Street, London WC1N 2DD (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: CHARGE ALLOCATION IN A MULTI-USER NETWORK

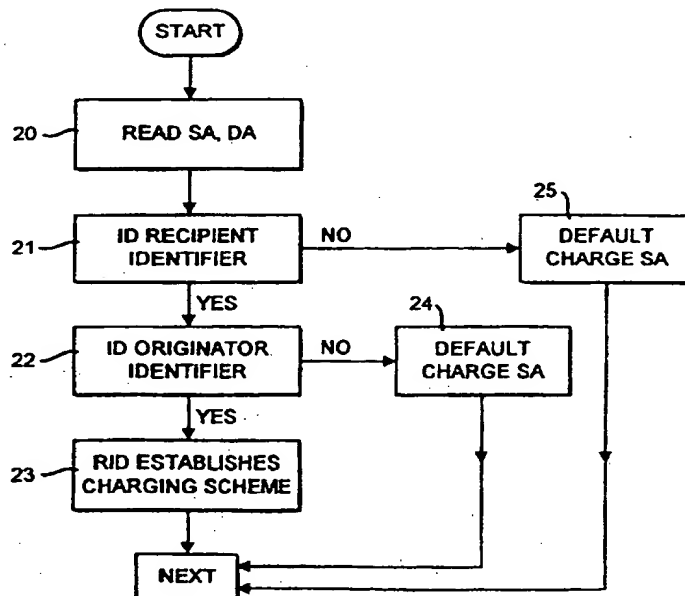

(57) Abstract

A communication network includes a communication monitoring point arranged to monitor user identifiers in source/destination identifier fields to determine the charging scheme.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CHARGE ALLOCATION IN A MULTI-USER NETWORK

The present invention relates to a communication network and in particular to charge allocation in multi-user networks in which access to the network is not controlled by the network provider.

With the advent of multi-user computer networks, whereby users can communicate with one another via user access points such as terminals included in the network across a communication medium such as telephone lines, the problem of how the users may be charged by the network provider for using a network has arisen.

When a particular network is used by a single customer only (e.g. private circuits), then the network provider can determine the total cost of providing that network and use this information to set the charges for the customer. However, where a network is used by more than one customer, the network provider must apportion the network charges in some way.

Where the network has some means of controlling customer access (access control) to the network then this same mechanism can also be used to monitor, and hence charge for, customers' usage of the network. A network incorporating access control means is shown schematically in Fig. 1. Users access the network designated generally as 1 via one of a plurality of terminals 2 all of which are connected to the network backbone 3. Each terminal 2 accesses the network backbone 3 via a respective access control 4. In the example shown the access control 4 is terminal-specific and can be arranged to record charging data such as call length, call type and/or call duration and ensure that the charge is attributed to the associated terminal 2.

For many network types, however, the network

provider does not have a means of controlling customer access such as that described above. Whilst the network provider in such cases could place an access control mechanism such as a usage monitor at each point of connection into the network, the provision, security, maintenance, and monitoring (to collect charge records) of such usage monitors would give rise to considerable expense and operational difficulties.

In fact such arrangements will give rise to considerable problems. This is a particularly significant point when it is recognised that many of the network types which do not provide an access control mechanism are the most commonly used network types such as:

- Local, wide and metropolitan area networks (LANs, WANS & MANs) e.g. office ethernet LANs.
- The ether, for example user to user direct radio communication.
- The proposed optical ether.

One solution is for network providers to charge their customers some form of subscription. Charging by subscription, though, may discourage potential customers who only expect to make limited use of the network and who would therefore effectively end up subsidising customers who are high network users.

Alternatively, where the network is provided as part of a package together with one or more value-added services, the service provider may incorporate the network costs into the value-added service charges to the end customers. In this case, however, the network is effectively being supplied to the service provider by an internal network provider; with the service provider paying the entire network cost. This is then a single-

user rather than multi-user scenario.

One of the essential characteristics of a broadcast network such as the examples listed earlier, is that the network traffic must traverse every potential access point in the network. Thus the entirety of the network traffic may be monitored at a single point, or, optionally in the case of dispersive media such as the ether (air) at a number of points throughout the network domain. In either case the number of monitoring points can be small in number compared to the number of customers using the network and the monitoring points can be removed from the customers' points of entry into the network. Such a system is shown in Fig. 2. Once again network 1 includes a plurality of terminals 2 and a network backbone 3. In this case, however, there are no access controls 4 but instead a single monitoring point 5 is provided on the network backbone 3 through which all traffic passes.

US 5,406,555 assigned to NEC Corporation relates to a local area network in which a charging apparatus is used in the local area network (LAN) or in bridge apparatus interconnecting the a. Packets passing through the charging apparatus include source and destination addresses, and packet counts are accumulated against the various combinations of source and destination addresses. Usage charges can be raised accordingly.

A problem associated with that system is that, in many cases, a call initiated by one customer to another may result in traffic flows back and forth between both parties for the duration of their interaction. Under the scheme described in US 5,406,555 there is no means of determining how the individual packets comprising such interactive calls should be charged. For example a packet with customer A as the source and customer B as

the destination could be part of an interaction sequence chargeable to A or B; there is no way to tell.

5 A solution proposed in JP 63290042 of NEC Engineering Corporation is to introduce an extra field, in addition to the source and destination identifiers (addresses), which would identify who should be charged; source, destination, or some third party. The problem with introducing an extra field is that in most cases it would not be compatible with the existing protocols
10 already in widespread use.

According to the invention there is provided a communication network comprising at least two user access points, a communication medium through which
15 communications between user access points pass and a communication monitoring point in the medium, wherein each user may be allocated a plurality of user identifiers associated with respective predetermined charging schemes, the network being arranged to accept communications including user identifiers in each of a
20 destination identifier field and a source identifier field and wherein the communication monitoring point is arranged to monitor user identifiers in a communication to determine the charging scheme.

Accordingly, various charging schemes are embraced
25 without the need for additional fields in the communications.

Hence, embodiments of the present invention provide an arrangement which overcomes or avoids at least to some extent, one or more problems associated with prior art.

30 For instance, embodiments of the invention provide an arrangement allowing each item of traffic to be allocated and charged to a predetermined party.

Further, embodiments of the invention provide an arrangement to allow each item of traffic to be charged

to the correct party without the need for introducing extra fields into the existing protocol.

5 The identifiers may comprise originator identifiers or recipient identifiers, respective charging schemes being associated with each recipient identifier. Where a communication includes an originator identifier and a recipient identifier the associated charging schemes may comprise: all charges to user associated with originator identifier, all charges to user associated with recipient
10 identifier, all charges to user associated with originator identifier at a premium rate, a proportion of the revenue proceeding to user associated with recipient identifier; charges shared between user associated with originator identifier and user associated with recipient
15 identifier; predetermined standard rate charges to user associated with originator identifier, additional charges to user associated with recipient identifier - where, for example, the predetermined standard rate is a local rate; and/or all charges to a predetermined third party. Where
20 a communication includes two originator identifiers or two recipient identifiers, the charging scheme may comprise all charges to user associated with identifier in source identifier field. The network may include a data storage area in which, against each originator
25 identifier, are stored allowed recipient identifiers for communications designating that originator identifier. The potential for fraud is thus reduced.

 The network may include a data storage area for storage of user information, allocated user identifier,
30 and associated charging scheme.

 The network may be arranged to operate in conformance with the ISO communications protocol, in which communications are passed at ISO layer 3.

 A multi-network communication system may be provided

comprising a plurality of communication networks as herein described, and in which user identifiers may be network specific. In that case, a simplified charging system between networks is achieved, as the originating network can easily be identified. The identifiers may comprise originator and recipient identifiers, and charges may be directed towards the network associated with the originator identifier.

According to the invention a charge allocation system is provided for a communication network as described herein comprising a communication monitoring point and a charge allocation sub-system, the network being arranged to accept communications including one of a plurality of user identifiers associated with respective predetermined charging schemes in each of a source identifier field and a destination identifier field, and the charge allocation sub-system storing user information, associated user identifiers, and respective corresponding charging schemes, wherein the communication monitoring point is arranged to monitor identifiers in the destination and/or source identifier fields of a communication and transfer the identifier information to the charge allocating sub-system to determine the charging scheme.

According to the invention there is further provided a method of allocating charges in a communication network for a plurality of users in which one or more users is assigned a plurality of user identifiers each associated with a respective predetermined charging scheme, communications in the network include destination identifier and source identifier fields in which the user identifiers are held, and a communication monitoring point monitors the user identifiers to establish an appropriate charging scheme.

Embodiments of the invention will now be described, by way of example, with reference to the drawings of which:

Fig. 1 is a schematic illustration of a prior art network including access control;

Fig. 2 is a schematic illustration of a prior art network including a network usage monitor at a single point within the network domain;

Fig. 3 shows a typical message packet format;

Fig. 4 is a representation of a charging table according to the present invention;

Fig. 5 shows, schematically, message packets exchanged according to the present invention;

Fig. 6 is a flow chart illustrating charge allocation according to the present invention;

Fig. 7 shows, schematically, message packets exchanged in a different format according to the present invention;

Fig. 8 shows, schematically, message packets exchanged in a multi-party conference according to the present invention;

Fig. 9 shows alternative message packets; and

Fig. 10 shows message packet exchange between networks.

The present invention addresses the problems identified above by allowing the allocation of different, multiple identifiers to customers according to their mode of use in a network, the identifiers being incorporated within the packet-types allowed under existing protocols, without the need for the addition of fields.

One such protocol, which will be discussed in conjunction with the specific embodiment addressed herein, but to which the invention is not of course limited, is the ISO protocol. The protocol comprises a

stack of various layers and it is proposed to operate the system at ISO layer 3; the network layer. The benefits of this approach are discussed in more detail below, but it should be noted that it allows multiple identifiers to be allocated to customers, as required under the present invention.

Under the protocol, communications between terminals accessing a network are sent in the form of packets and a simplified packet format is shown in Fig. 3. The packet is divided into various fields including a header shown generally as 10 containing administration information about the nature of the packet, an information field 11 containing the actual message communicated in the packet and a check field 12 for detecting errors in the packet under, for example, a cyclic redundancy check code (CRC). Turning to the header 10 in more detail, it comprises a preamble (P) 13, a destination address or identifier field (DA) 14 and a source address or identifier field (SA) 15.

The destination identifier (DA) 14 indicates where the message is being sent to and the source identifier (SA) 15 indicates where the message is being sent from.

In order to embrace various different charging schemes - such as sender pays, receiver pays, third party pays or other variants discussed below, multiple identifiers are allocated to customers which can be entered in the destination or source identifier fields (DA,SA) 14,15. Two principal types of customer identifier are provided signifying the following usage modes:

1. Originator identifiers. An originator identifier indicates that the corresponding customer originated the call and will accept the call charging scheme as

determined by the recipient identifier.

2. Recipient identifiers. A recipient identifier indicates that the corresponding customer received the call and would also determine how the call charges should be allocated.

In this context a call is taken to be a related sequence of exchanges between two or more parties.

Every customer is allocated at least one recipient identifier which could be considered the customer's normal identifier and can be compared in some ways to a PSTN (public switched telephony network) telephone number, i.e. this is the identifier (number) used to contact the corresponding customer.

Each recipient identifier is allocated and registered by the network operator who also associates a charging scheme with that recipient identifier. The default charging scheme may be that the call originator (identified by an originator identifier) should pay the call costs. Other charging schemes comprising special trafficking schemes can also be applied including: the recipient paying for the call; the originator paying a premium rate with part of the call revenue going to the recipient; the originator and recipient sharing the charges in some way; or the originator paying the equivalent of the "local rate" and the recipient paying the balance. As a further alternative charges can be allocated to a third party. It will be seen that any general scheme whereby charges are allocated to one or more of the originator, the recipient and a third party may be adopted.

Customers may have more than one recipient identifier with each identifier associated with a different charging

scheme.

Referring to Fig. 4 charging information can be maintained by the network operator in a suitable charging table in which an entry is kept against each allocated recipient identifier indicating the charging scheme associated with the recipient identifier. For example a first unique recipient identifier RID_1 is allocated to recipient R_A and designates that the originator of the call be charged. Recipient identifier RID_2 is also allocated to recipient R_A and designates that recipient R_A should be charged. Recipient identifier RID_3 is also allocated to R_A and indicates that the call originator should be charged, for example at a premium rate, a part of the call revenue going to recipient R_A . Recipient identifier RID_4 is also allocated to recipient R_A and designates that the charge should be shared between the call originator and recipient R_A , for example with each party paying one half of the charge.

The system would then be implemented as follows:

For two-party calls the call originator would be identified by an originator identifier while the call recipient would be identified by one of their recipient identifiers. These identifiers would appear as the source or destination identifiers depending on the direction of flow of each packet comprising the exchange between the call originator and recipient. This is illustrated in Fig. 5. An originator (first customer) using terminal 2_A calls a recipient (second customer) at terminal 2_B . The call from the originator has the first customer's originator identifier OID_A as the source identifier (SA) and the second customer's recipient identifier RID_B as the destination identifier (DA). In the return message from the second customer at terminal 2_B the source identifier (SA) is the second customer's

recipient identifier RID_B and the destination identifier (DA) is the first customer's originator identifier OID_A .

5 The call charges are then allocated according to the charging scheme associated with the recipient identifier RID_B , as will be discussed in more detail below. For example, the charges for all packets flowing in both directions between the originator and the recipient may be allocated to the originator.

10 The flow chart of Fig. 6 illustrates the system by which charges are allocated. As discussed above, all packets pass through a monitoring point 5 within a network backbone 3 as shown in Fig. 2. The source identifier and destination identifier of each packet are then read (20) and the recipient identifier is identified (21). The originator identifier is also identified (22) and the recipient identifier is compared against its charging scheme entry (Fig. 4) to establish the corresponding charging scheme, and, dependent on the charging scheme, will charge the call to the originator as identified by the originator identifier, or follow any other allocated charging scheme. The charges are determined on the basis of any known system, for example a fixed charge per packet, the charge based on the duration of the packet, a charge based on the distance of the call, the time of day, the packet type and so forth.

25 Generally, in order to determine whether an identifier is an originator or recipient identifier the network provider which allocated the identifier consults its allocation tables and recognises the identifier type accordingly. Preferably, however, it is possible to distinguish different identifiers in terms of:

the network provider who allocated the identifier;
originator or recipient identifier;
optionally different types of recipient identifier.

With regard to recognising different types of recipient identifier it is desired to be able to at least distinguish which party pays in terms of:

originator;

5 recipient; or

other scheme such as premium rate, third party or shared allocation. These systems would be particularly advantageous when operating over multiple network domains.

10 It should be noted that customers may have one or more originator identifiers, also allocated by the network operator. In that case a further table corresponding to that shown in Fig. 4 will contain entries indicating which charging account is associated
15 with which originator identifier. When a recipient identifier is received indicating that the call originator as identified by an originator identifier within the same packet should be charged, the sub-account entry corresponding to the originator identifier is
20 billed. The originator identifier would normally only be used for making calls (directed to a recipient identifier), and may optionally be allocated only for the duration of a call as is discussed in more detail below.

25 If desired, customers can communicate without using originator identifiers, i.e. with all parties using their recipient identifiers. This is the fallback case which matches the situation in known network arrangements with each customer normally having just one identifier which is used for all their communications. There would be no
30 way to choose between the charging schemes associated with the two recipient identifiers and the network operator would have to use the default scheme of allocating usage charges to whichever customer is identified as the source of each packet.

According to that system, and as shown in Fig. 7, the packets from the first customer at terminal 2_A to the second customer at 2_B include as their source identifier (SA) the first customer's recipient identifier RID_A and as the destination identifier (DA) the second customer's recipient identifier RID_B . The return message from terminal 2_B to terminal 2_A will have as its source identifier (SA) the second customer's recipient identifier RID_B and as its destination identifier (DA) the first customer's recipient identifier RID_A .

The operation of this system is also shown in the flow chart of Fig. 6 wherein, if no originator identifier is identified at 22 the system moves to the default step 24 of charging whoever is identified as the source of each packet.

It is also possible that packets can be launched with originator identifiers used for both the source and destination. The default step is shown at Fig. 6 whereby, if no recipient identifier is identified at 21 the default scheme provides for the allocation of usage charges to whichever customer is identified as the source of each packet.

The invention further embraces the possibility of multi-party exchanges (many to many, one to many, many to one) without using originator identifiers in the same way as for two-party exchanges (one to one) with the participants all identified by their recipient identifiers and with each participant allocated the charges for the packets they source, according to the default step 24 in Fig. 6.

Alternatively a conference organiser could be allocated a recipient identifier, with an associated charging scheme, which they would then advertise in some way.

As shown in Fig. 8 the conference organiser at a terminal 2_{CONF} sends potential participants at 2A, 2B, 2C invitations using the conference recipient identifier RID_{CONF} as the source identifier (SA). Since the destination identifier (DA) on each invitation is the invitee's recipient identifier RID_{A/B/C}, both the source and destination of the invitation message packets are recipient identifiers (the default step 24 of Fig. 6) and the network charges for these packets are allocated to their source, i.e. the conference organiser.

Customers wishing to participate in the conference then "dial in" and submit their contributions using their own originator identifier OID_{A/B/C} as the source identifier (SA) and the conference recipient identifier RID_{CONF} as the destination identifier (DA). The contributions and responses of other participants are obtained by monitoring other traffic with the conference recipient identifier RID_{CONF} as the destination. Any contributions from the conference organiser to 2_{CONF} would also have the conference recipient identifier RID_{CONF} as the destination.

A charging scheme suitable for this form of network based conferencing is where the conference organiser accepts part or all of the network charges. Any attempt to collect premium rate network charges from participants would probably require each participant to be connected on a one to one basis to a conference bridging unit; with encryption used to prevent other network users from eavesdropping or interrupting. Such a system would allow the filtering out (shut-out) and ignoring of any one sending in contributions using their own recipient identifier (or some target customers' recipient or originator identifier) to avoid paying the premium rate charges. Security issues are discussed further below.

It will be appreciated that network users may try to

avoid paying network charges. In the following discussion the term "target customer" will be used to refer to the potential victim of a fraud. Two principal scenarios are considered as illustrated in Fig. 9:

5

1. Packets are sent to the target customer but the sender endeavours to avoid paying the full network charges which would normally be associated with the target customer's recipient identifier. This scenario has two variations:

10

- Packets 30 are sent to the target customer using the target customer's recipient identifier RID_A as destination identifier (DA).
- Packets 31 are sent to the target customer using the target customer's originator identifier RID_A as destination identifier (DA).

15

2. Packets 32 are sent, potentially to any destination, with the sender impersonating a target customer and using the target customer's originator or recipient identifier OID_A/RID_A as the source identifier (SA) so that the sender can avoid paying the network charges.

20

25

Where a target customer's recipient identifier RID_A is used as the destination identifier (DA) for a packet 30 then: either the source identifier (SA) will be another recipient identifier RID_B in which case the network charges will be allocated to the source customer (i.e. the other party pays as per default step 24 in Fig. 6); or the source identifier (SA) will be an originator identifier OID_B in which case the recipient identifier RID_A will determine who gets charged and how (i.e. the target customer controls the charging scheme).

30

A potential fraudster may use a recipient identifier RID_B instead of an originator identifier OID_B as their source identifier (SA) when contacting a target customer in order to avoid the full call charges which the potential fraudster should incur under the charging scheme associated with the target customer's recipient identifier RID_A (the destination identifier (DA)), particularly if this would charge the potential fraudster at a premium rate. This is in accordance with the default step 24 in Fig. 6. In this situation the target customer can simply decline to respond to the potential fraudster. It would be the need for this ability to shut out invalid participants which is likely to restrict the form of network based conferencing described above to those charging schemes where the conference organiser accepts part or all of the network charges.

Where the target customer's recipient identifier RID_A is associated with a charging scheme which allocates the network charges to the target customer there would be the potential for malicious callers, using originator identifiers OID_B , to repeatedly contact the target customer tying up resources and causing the target customer to incur unwanted network charges. If a valid originator identifier OID_B is used then the culprits could be traced easily by the network operator who allocated the originator identifier OID_B . The problems of abuse and impersonation of originator identifiers are discussed below.

Where a target customer's originator identifier OID_A is used as the destination identifier (DA) for a packet then: either the source identifier (SA) will be another originator identifier OID_B in which case the network charges will be allocated to the source customer (i.e. the other party pays as per default step 25 in Fig.

6); or the source identifier (SA) will be a recipient identifier RID_B in which case the recipient identifier will determine who gets charged and how. In the latter case the sender thus has control over how the packets 31 they have sent out will be charged.

A potential fraudster could in principle send packets 31 to a target customer using the target customer's originator identifier OID_A as the destination identifier (DA) and using one of the fraudster's recipient identifiers RID_B as the source identifier (SA). If the fraudster uses a recipient identifier RIB_B which has a charging scheme whereby premium rate charges are allocated to the (target) customer corresponding to the originator identifier OID_A , with part of the call revenue being passed to the (fraudster) customer corresponding to the recipient identifier RID_B , then the fraudster could collect money (from the network operator) simply by sending packets 31 out to target customers.

Fraudsters attempting to operate in this way could be detected by target customers checking the source identifiers (SA) of any packets 31 sent to them using their originator identifier OID_A . Once detected a fraudster could be traced by the network operator who allocated their recipient identifier RID_B .

Alternatively the network operator could maintain a list of valid recipient identifiers RID against each originator identifier OID . Then when a customer (a caller) wished to use their originator identifier OID to contact another customer (the called party), they would first inform the network operator who would add the called party's recipient identifier RID to the list of valid recipient identifiers RID registered against the caller's originator identifier OID . The caller would then communicate with the called party in the manner described

above with reference to Fig. 5. At the end of the exchange the caller would again contact the network operator who would now remove the called party's recipient identifier RID from the list of valid recipient identifiers RID registered against the caller's originator identifier OID. Customers may choose to have certain (trusted) recipient identifiers RID permanently registered. The communications with the network operator could be secured using encryption and digital signatures. Accordingly originator identifiers OID may be allocated only for the duration of a call.

Thus any packets 31 sent out with a target customer's originator identifier OID_A as the destination identifier (DA) and with an invalid (unregistered) recipient identifier RID_B as the source identifier would be charged to the source customer (corresponding to the recipient identifier RID_B) making fraud of the type described earlier considerably more difficult.

Potential fraudsters may use a target customer's recipient or originator identifiers RID_A/OID_A as the source identifier (SA) for packets 32; potentially with any destination to avoid having to pay any associated network charges. Typically the fraudster may use the target customer's recipient identifier RID_A (which should be readily available) as the source identifier (SA) to send packets 31 to a valid destination (identified by its recipient identifier RID) so that the target customer pays the network charges. Alternatively packets could be launched with various combinations of originator and recipient identifiers OID/RID as destination identifiers (DA), not to achieve any data transmission, but simply to waste resources and cause the corresponding customers to incur unwanted network costs. Such packets are shown in Fig. 9 referenced 32.

One way to detect such behaviour would be for each (target) customer to monitor the network for any traffic (launched elsewhere) for one of their own recipient or originator identifiers RID/OID as the source identifier (SA). Tracing the culprits would then require the network operator to track down the physical source of any such pirate traffic.

Accordingly, the potential for fraud in the system can be restricted or eliminated by various straightforward means.

As discussed above, the scheme of the present invention can be applied at ISO layer 3, the network layer. At this layer the internet protocol (IP) operates allowing multiple recipient and originator identifiers to be allocated to customers. There is currently some restriction on the number of IP identifiers available but this limitation is being addressed by the Internet Engineering Task Force (IETF).

On the other hand, the prior art reference US 5,406,555 discussed above uses source and destination identifiers at the ISO layer 2 (link layer) protocol; this is typically the ethernet protocol. At this level each identifier is generally associated with a particular piece of equipment (for example a computer terminal) connected to the network and it would be difficult to assign multiple recipient and originator identifiers to customers.

An advantage in applying the scheme described in this document at the network layer (ISO layer 3) would be that a common set of customer identifiers could be used across a multiplicity of bearer networks in the manner shown in Fig. 10, as is the case with IP addresses (identifiers). This will, however, necessitate the ability to allocate charges for packets passing into, out

of, or through each network domain 40A,B,C.

5 To achieve allocation in this manner each network provider 41A,B,C handles a packet to pass the charges directly to the source network provider. This would be straightforward if the allocating network provider can be identified from each recipient and originator identifier, e.g. through the association of a particular range of identifiers with each network provider as is currently the case with IP addresses.

10 Packets with two recipient identifiers (or two originator identifiers) as the source and destination identifiers would thus be correctly allocated. On receipt of the charges for packets with one originator and one recipient identifier the (source) network provider
15 would check whether the recipient identifier was valid for the given originator identifier (as discussed above), check the charging scheme associated with the recipient identifier, and settle up with the other party's (destination) network provider as appropriate.

20 If originator and recipient identifiers can be easily distinguished, and provided most packets with one originator and one recipient identifier end up being charged to the customer corresponding to the originator identifier, then the above process could be made more
25 efficient by directing the charges for such packets towards the originator's network provider (which may or may not be the source network provider).

By allocating charges to network providers using the simple rules described above the network monitors and
30 charge raising systems would not be required to store (and maintain) large quantities of customer identifier and charging scheme data for customers outside their local network, and could be dimensioned to optimise the trade off between storing unprocessed charge records and

the costs of communicating with other network providers to present packet charge records, check the applicable charging schemes and settle up their accounts.

5 Another opportunity for fraud in a multi-network scheme occurs because a target customer can only monitor their local network for pirate packets sourced by fraudsters impersonating that target customer. Such pirate traffic on other networks would not be detected, but the charges would still come back to the target
10 customer. This could be addressed by the target customer's network provider monitoring charges arriving from other domains to ensure that those charges correspond to valid traffic patterns. For example the provider could check that, where packet charges are
15 received from some distant domain, corresponding charges are also received from intermediate networks along a valid route.

By virtue of the association of different identifiers with network users for allocating usage
20 charges, the system allows the allocation of network charges based on customer usage wherein low users do not have to subsidise high users as would be the case under a flat rate subscription charging regime. The system is thus far more attractive to smaller customers wishing to
25 make use of the network. In addition, the various exchanges in an interactive call sequence can be collated and charged to any desired party involved in the call without the need to define additional fields and transmission protocols employed.

30 Whilst the invention has been discussed above in relation to a standard network such as a local area network, it will be appreciated that it can be applied to other network systems, with or without access controls, but wherein all messages must pass through a single, or

5 a small number of points relative to the number of available access points. It will further be appreciated that any number of originator and recipient identifiers may be allocated dependent only upon limitations of the system protocol, allowing a desired charging scheme to be adopted. For example a recipient identifier may indicate that all charges are to be made to an identified third party.

CLAIMS

1. A communication network comprising at least two user access points, a communication medium through which communications between user access points pass and a communication monitoring point in the medium, wherein each user may be allocated a plurality of user identifiers associated with respective predetermined charging schemes, the network being arranged to accept communications including user identifiers in each of a destination identifier field and a source identifier field and wherein the communication monitoring point is arranged to monitor user identifiers in a communication to determine the charging scheme.
2. A communication network as claimed in claim 1 in which the identifiers comprise originator identifiers or recipient identifiers, respective charging schemes being associated with each recipient identifier.
3. A communication network as claimed in claim 2 in which where a communication includes an originator identifier and a recipient identifier the associated charging schemes comprise: all charges to user associated with originator identifier, all charges to user associated with recipient identifier, all charges to user associated with originator identifier at a premium rate, a proportion of the revenue proceeding to user associated with recipient identifier; charges shared between user associated with originator identifier and user associated with recipient identifier; predetermined standard rate charges to user associated with originator identifier, additional charges to user associated with recipient identifier; and/or all charges to predetermined third

party.

4. A communication network as claimed in claim 2 in which, where a communication includes two originator
5 identifiers or two recipient identifiers, the charging scheme comprises all charges to user associated with identifier in source identifier field.

5. A communication network as claimed in any of the
10 claims 2 to 4 including a data storage area in which, against each originator identifier, are stored allowed recipient identifiers for communications designating that originator identifier.

6. A communication network as claimed in any preceding
15 claim including a data storage area for storage of user information, allocated user identifier, and associated charging scheme.

7. A communication network as claimed in any preceding
20 claim arranged to operate in conformance with the ISO communications protocol, and in which communications are passed at ISO layer 3.

8. A multi-network communication system comprising a
25 plurality of communication networks as claimed in any preceding claim.

9. A system as claimed in claim 8 in which user
30 identifiers are network specific.

10. The system as claimed in claim 9 in which the identifiers comprise originator and recipient identifiers, and charges are directed towards the network

associated with the originator identifier.

11. The system as claimed in claim 9 in which the identifiers comprise originator and recipient identifiers, and charges are directed towards the network associated with the recipient identifier.

12. A charge allocation system for a communication network as claimed in any of claims 1 to 7 comprising a communication monitoring point and a charge allocation sub-system, the network being arranged to accept communications including one of a plurality of user identifiers associated with respective predetermined charging schemes in each of a source identifier field and a destination identifier field, and the charge allocation sub-system storing user information, associated user identifiers, and respective corresponding charging schemes, wherein the communication monitoring point is arranged to monitor identifiers in the destination and/or source identifier fields of a communication and transfer the identifier information to the charge allocating sub-system to determine the charging scheme.

13. A method of allocating charges in a communication network for a plurality of users in which one or more users is assigned a plurality of user identifiers each associated with a respective predetermined charging scheme, communications in the network include destination identifier and source identifier fields in which the user identifiers are held, and a communication monitoring point monitors the user identifiers to establish an appropriate charging scheme.

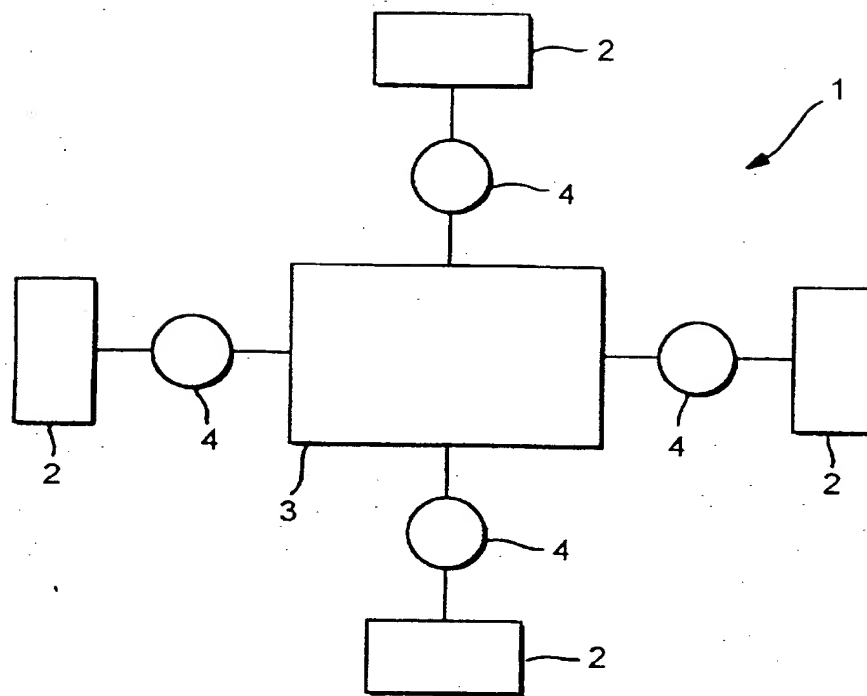


FIG. 1
PRIOR ART

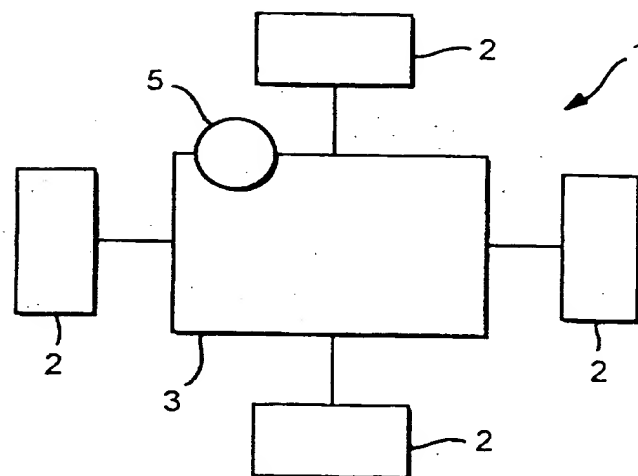


FIG. 2
PRIOR ART

SUBSTITUTE SHEET (RULE 26)

2 / 5

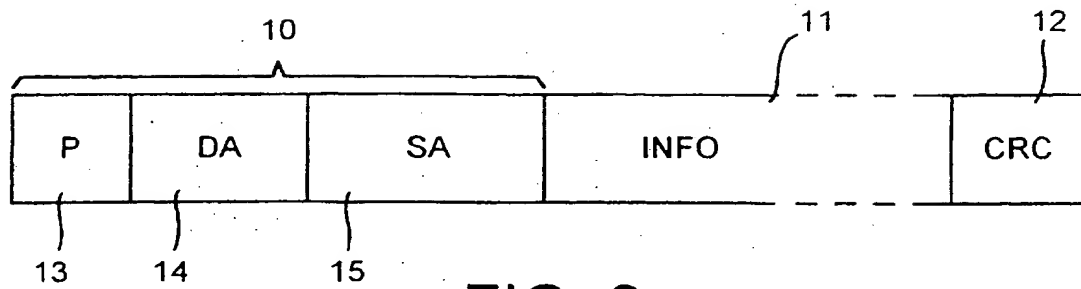


FIG. 3

RECIPIENT IDENTIFIER CHARGE SCHEME ALLOCATED TO:

RID ₁	CHARGE CALL ORIGINATOR	R _A
RID ₂	CHARGE R ₁	R _A
RID ₃	CHARGE CALL ORIGINATOR PAY R _A	R _A
RID ₄	CHARGE CALL ORIGINATOR 50% CHARGE R _A 50%	R _A
○ ○	○ ○	○ ○
RID _N	CHARGE CALL ORIGINATOR	R _M
○ ○ ○	○ ○ ○	○ ○ ○

FIG. 4

3 / 5

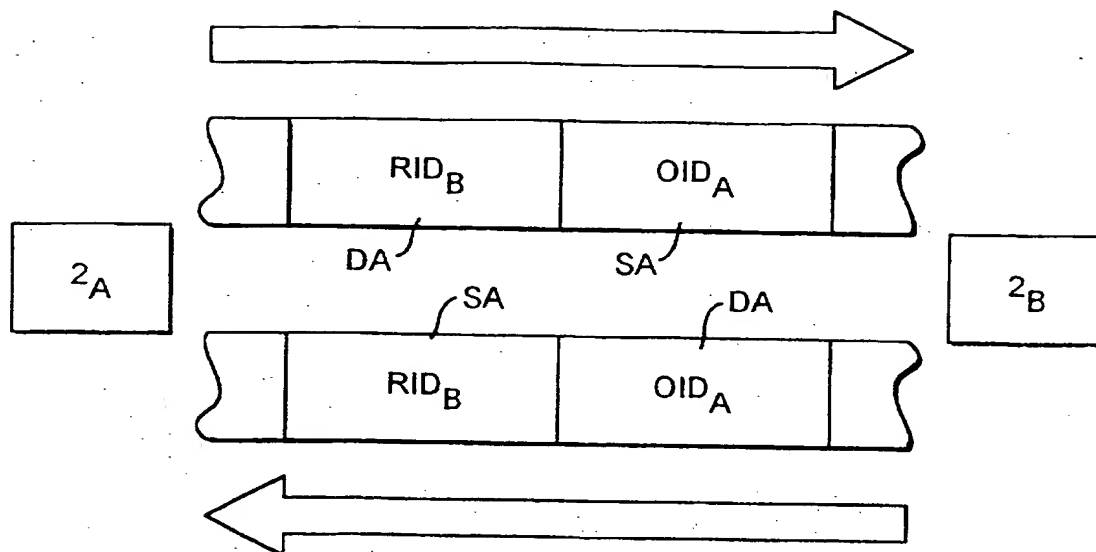


FIG. 5

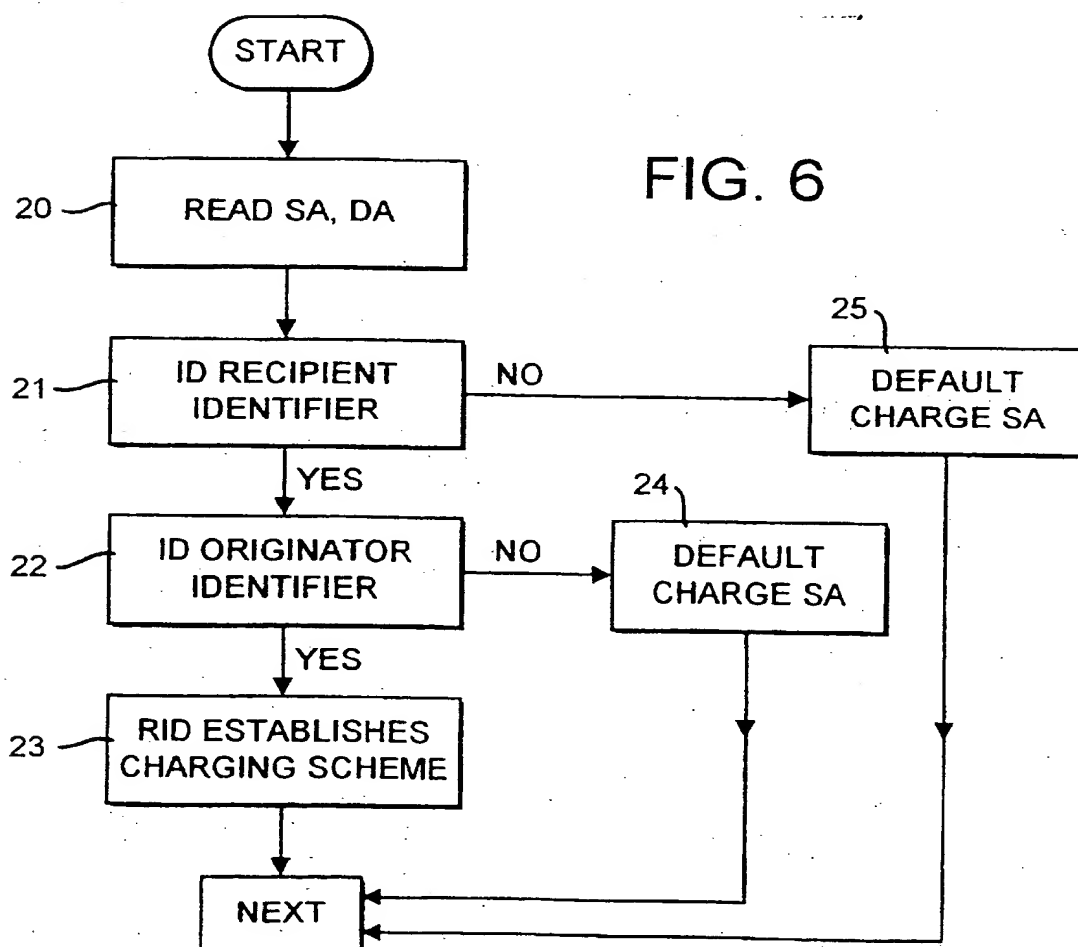


FIG. 6

SUBSTITUTE SHEET (RULE 26)

4 / 5

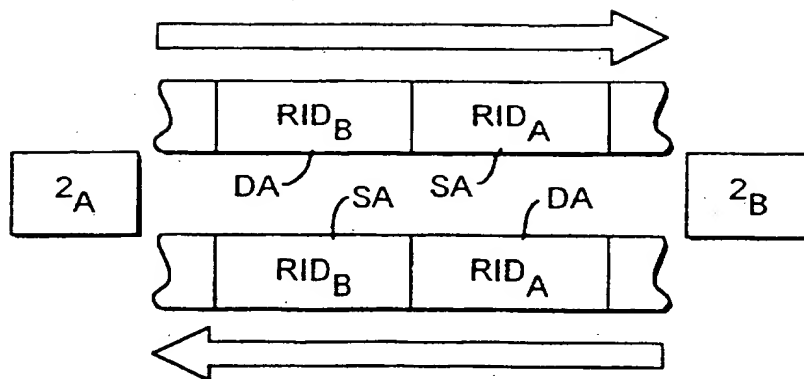


FIG. 7

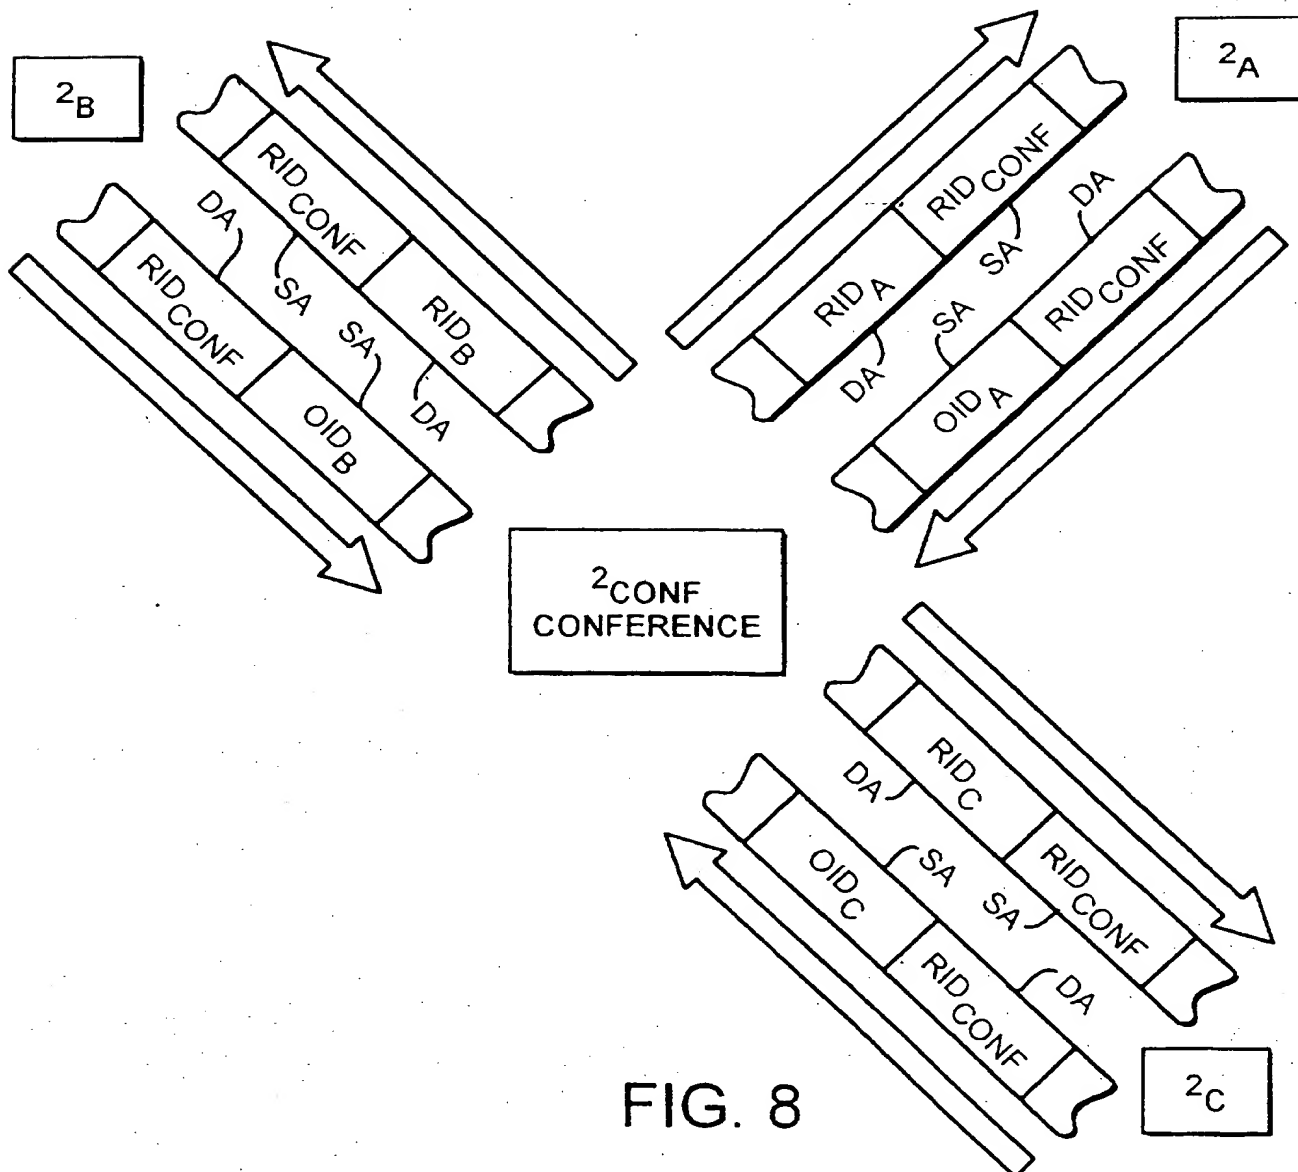


FIG. 8

SUBSTITUTE SHEET (RULE 26)

5 / 5

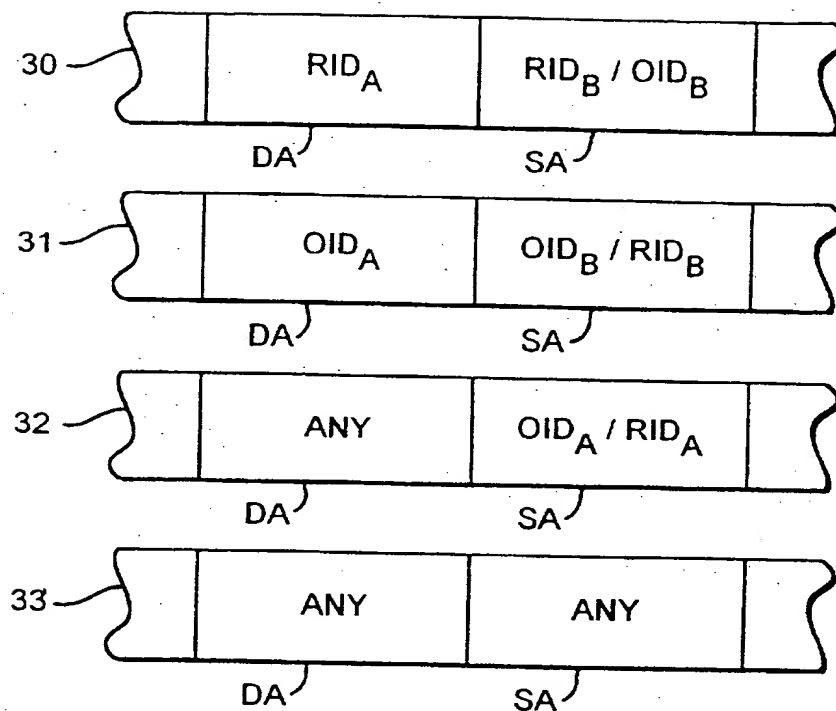


FIG. 9

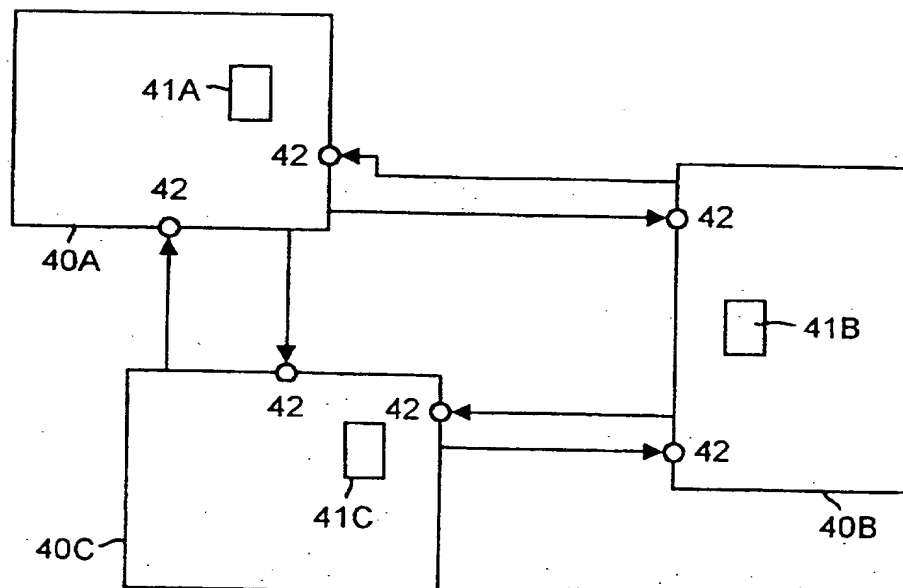


FIG. 10

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

Inter nal Application No
PC 1/GB 97/00842

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L12/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 406 555 A (YOSHIDA ATSUSHI) 11 April 1995 cited in the application see the whole document ---	1-13
A	PATENT ABSTRACTS OF JAPAN vol. 95, no. 006 & JP 07 154387 A (NEC CORP), 16 June 1995, see abstract ---	1-13
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 375 (E-1578), 14 July 1994 & JP 06 104922 A (NEC CORP), 15 April 1994, see abstract --- -/-	1-13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

23 June 1997

Date of mailing of the international search report

07.07.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Mikkelsen, C

INTERNATIONAL SEARCH REPORT

International Application No
PC1/GB 97/00842

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 639 013 A (FRANCE TELECOM) 15 February 1995 see abstract</p> <p>-----</p>	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/GB 97/00842

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5406555 A	11-04-95	JP 6021942 A	28-01-94
EP 0639013 A	15-02-95	FR 2707775 A	20-01-95
		JP 7095197 A	07-04-95

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page Blank (uspto)

1 / 5

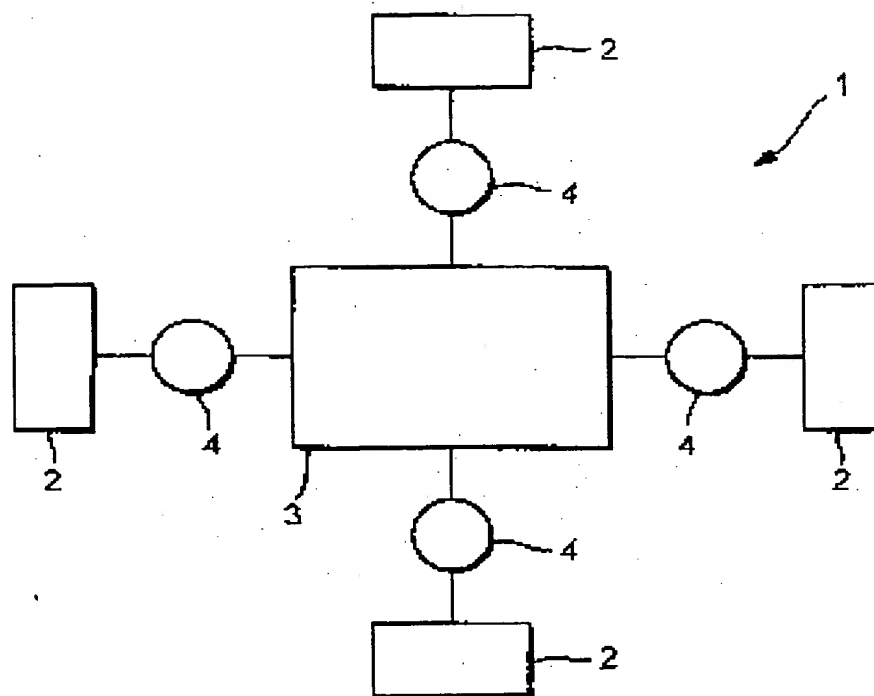


FIG. 1
PRIOR ART

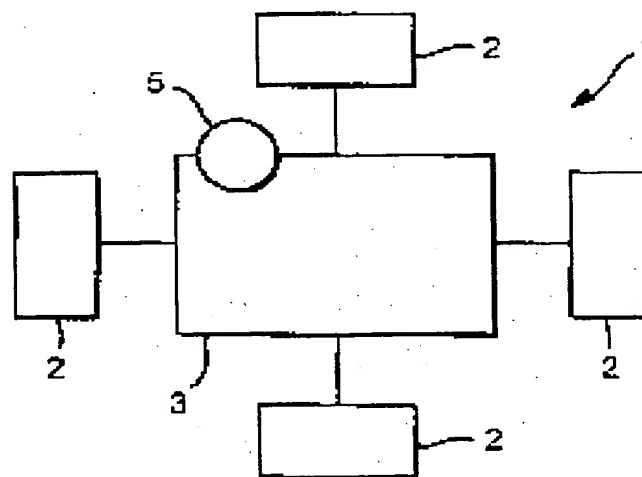


FIG. 2
PRIOR ART

SUBSTITUTE SHEET (RULE 26)

2/5

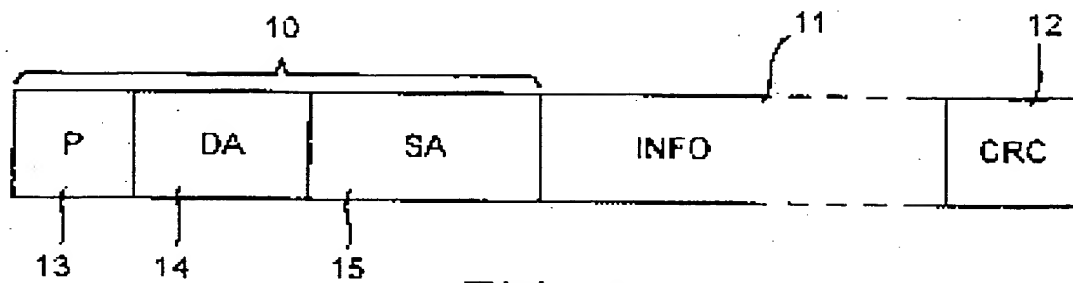


FIG. 3

RECIPIENT IDENTIFIER	CHARGE SCHEME	ALLOCATED TO:
RID_1	CHARGE CALL ORIGINATOR	R_A
RID_2	CHARGE R_1	R_A
RID_3	CHARGE CALL ORIGINATOR PAY R_A	R_A
RID_4	CHARGE CALL ORIGINATOR 50% CHARGE R_A 50%	R_A
o o	o o	o o
RID_N	CHARGE CALL ORIGINATOR	R_M
o o o	o o o	o o o

FIG. 4

3 / 5

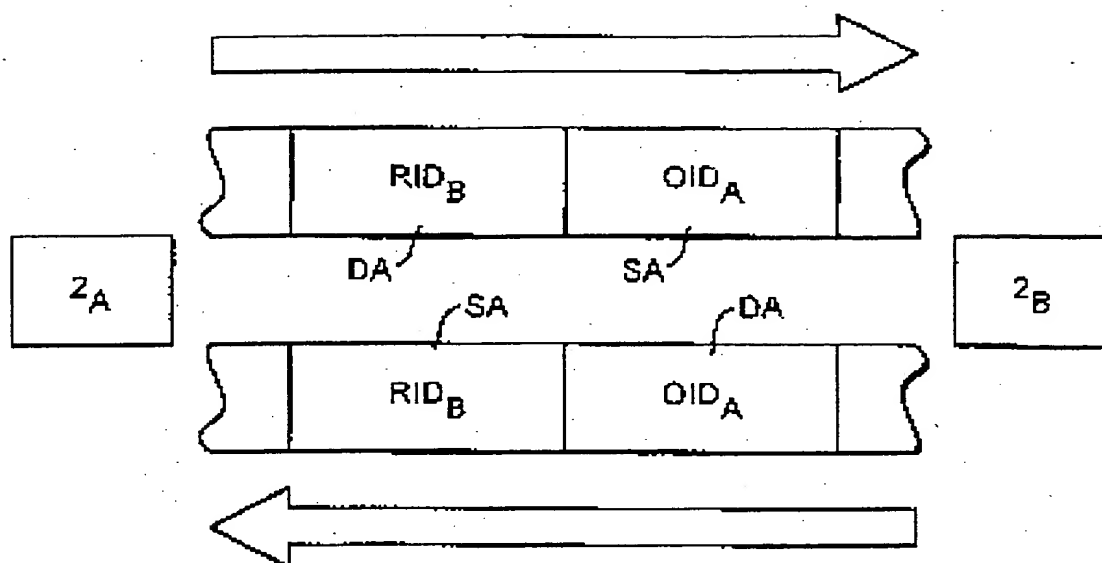


FIG. 5

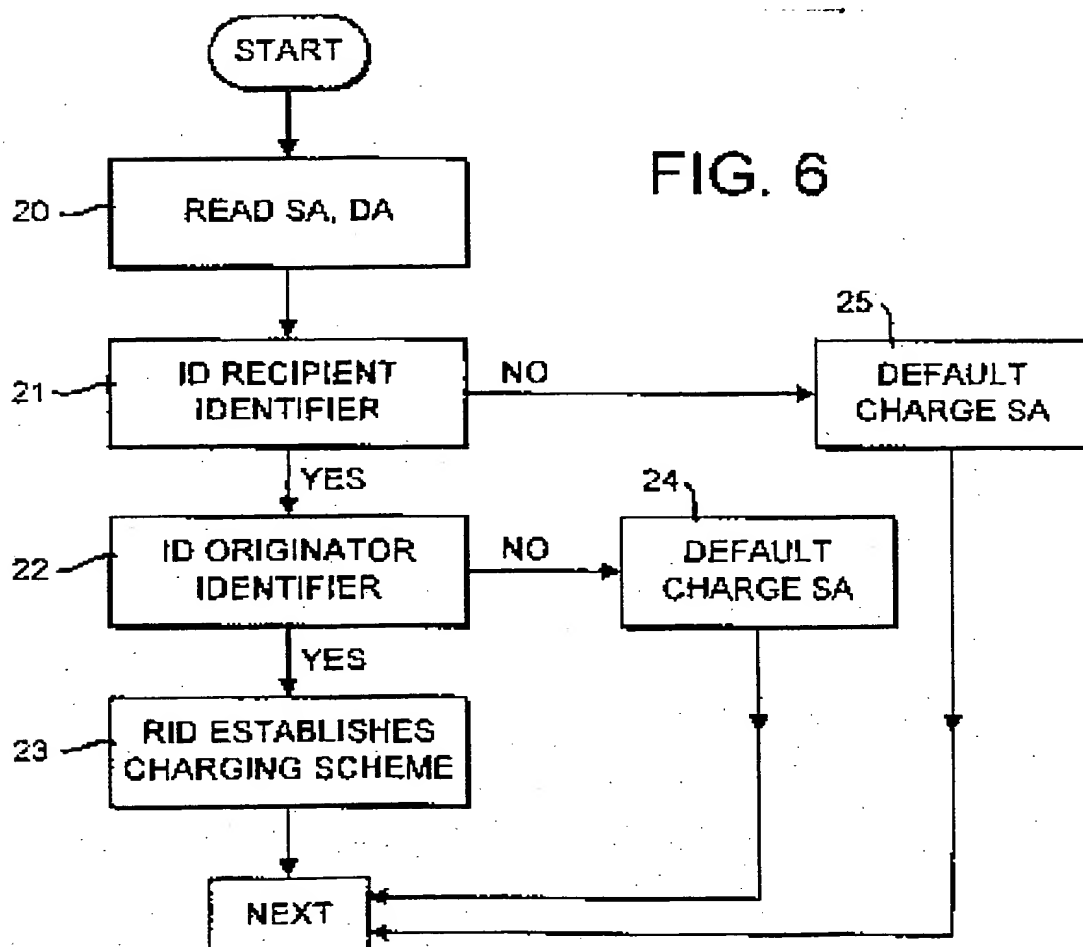


FIG. 6

SUBSTITUTE SHEET (RULE 26)

4 / 5

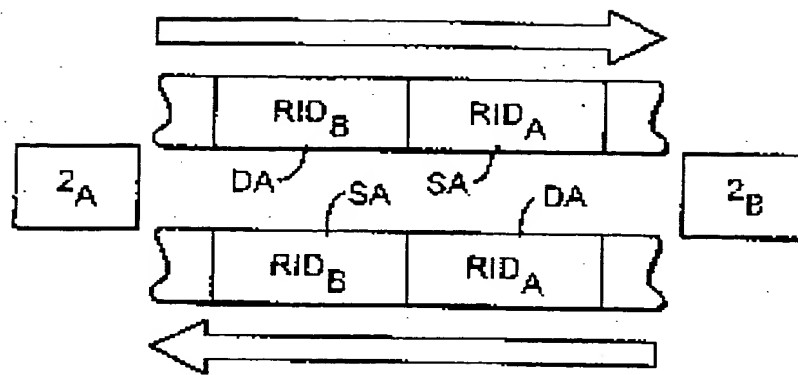


FIG. 7

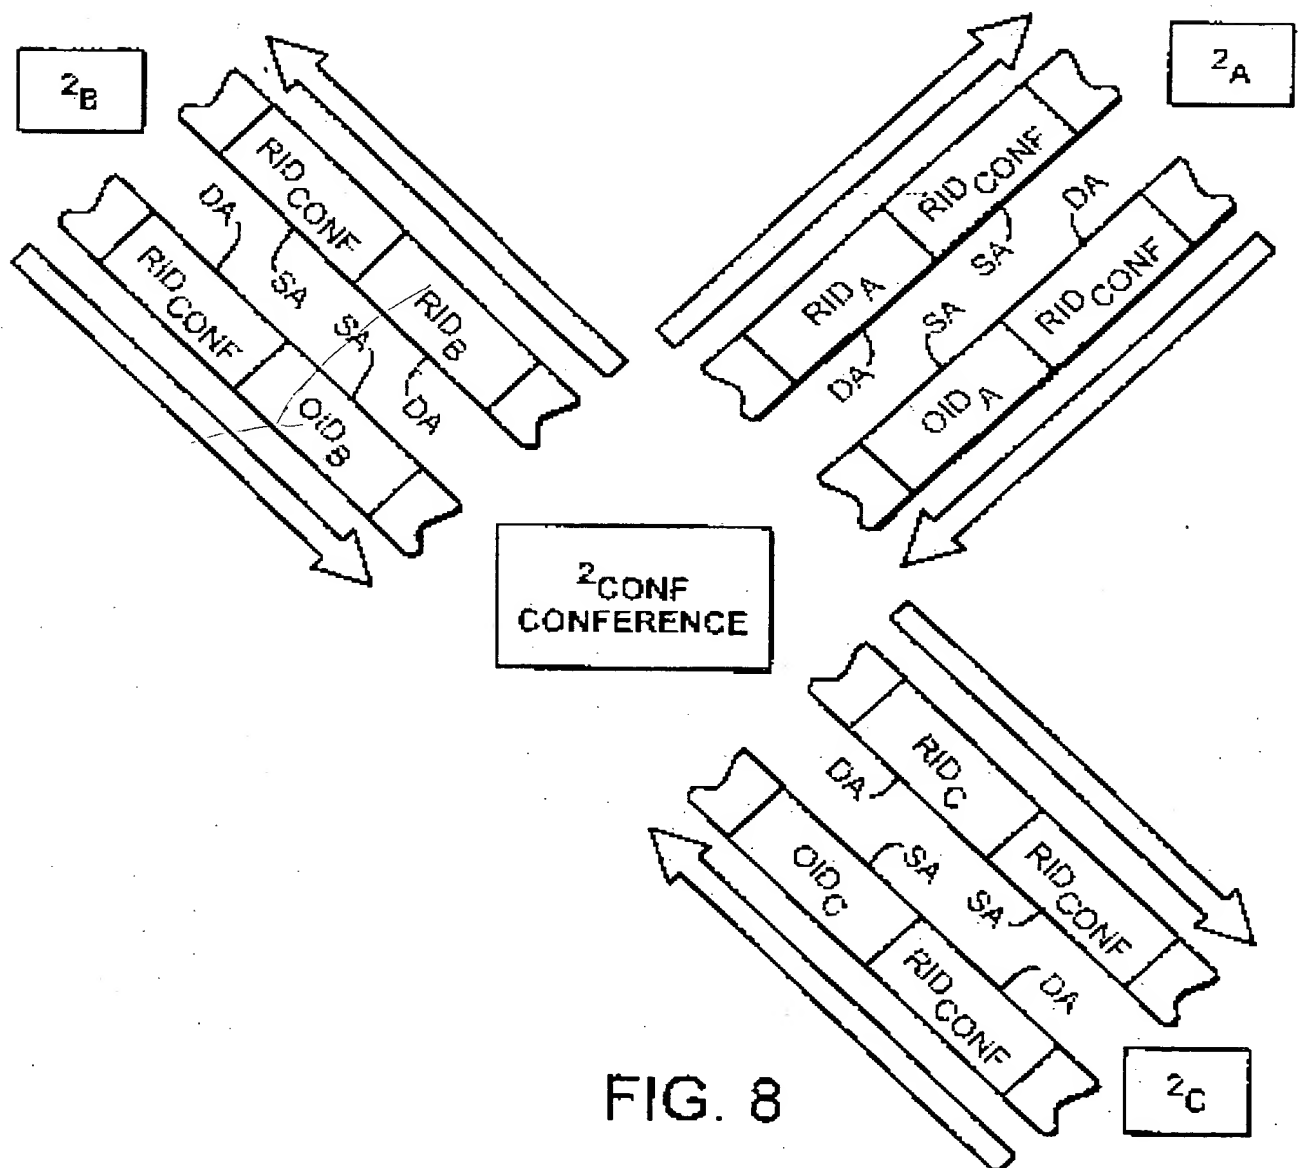


FIG. 8

SUBSTITUTE SHEET (RULE 26)

5 / 5

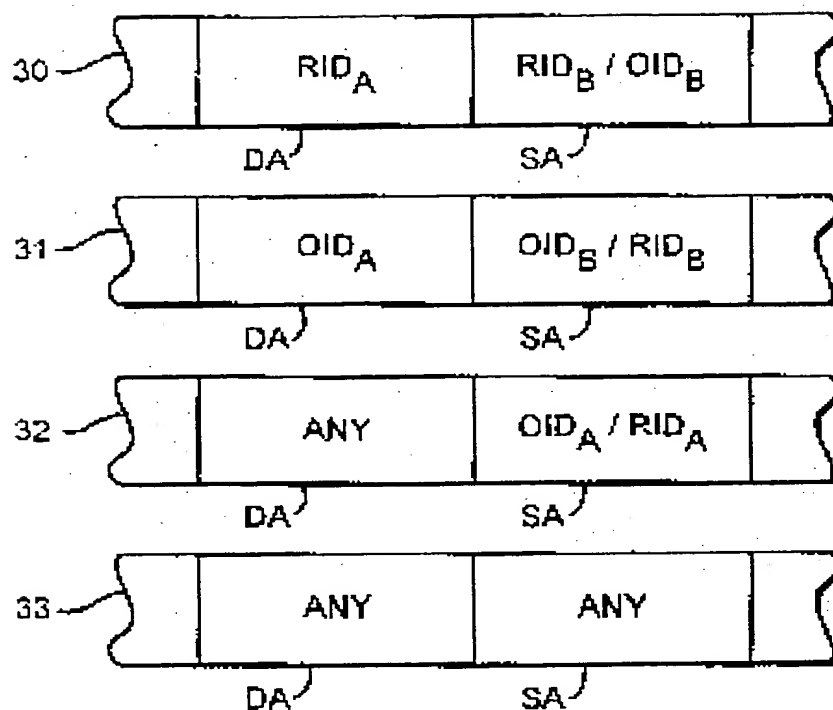


FIG. 9

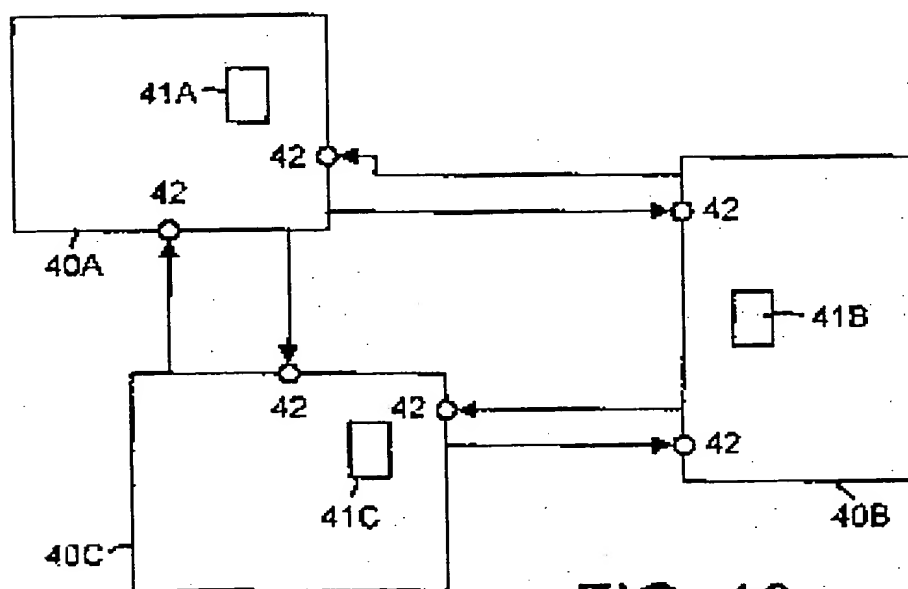


FIG. 10

This Page Blank (uspto)